


CO-9D BATTERY POWERED CO ALARM

Sensor type	Advanced electrochemical
Battery type	7 year sealed for life lithium



- Advanced electrochemical sensor calibrated and tested in CO gas.
- 7 year sealed for life lithium battery.
- Unique digital LCD screen.
- The alarm has a built in room temperature indicator with a range of ± 2 degrees.
- Shows the peak levels of CO detected over a 4 week period.
- Can be free-standing or wall mounted.
- Test button - to test circuitry and sounder.
- End of life indication.

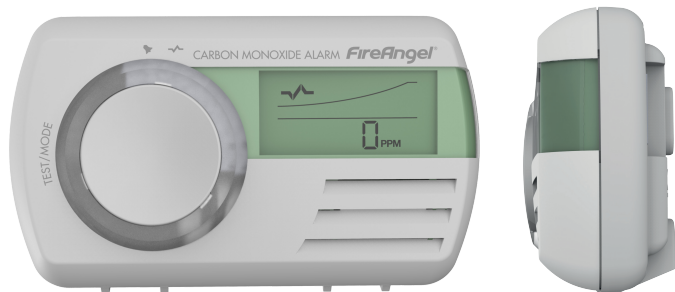

BS EN50291-1:2010+A1:2012
BS EN50291-2:2010
Licence No: KM 551504



Technical Specification

Dimensions	125mm (width) x 72mm (height) x 40mm (depth)	
Supply voltage	3VDC	
Battery	7 year sealed for life lithium battery	
Technology	Advanced electrochemical	
Alarm sound level	85dB(A) at 1m (minimum)	
Installation positions	Wall / Free-standing	
Operating temperature	-10°C to +40°C	
Operating humidity	30% to 90% RH non-condensing	
Storage temperature	-20°C to +60°C	
Storage humidity	30% to 90% RH non-condensing	
Plastic material	ABS, UL94 VO fire retardant	
Warranty	7 years	
Weight	118g	
Certified to	BS EN50291-1:2010+A1:2012 and BS EN50291-2:2010	
Independently tested to	N/A	
Maximum number of connected units	N/A	
Operating Frequency	N/A	
Range	N/A	

For further information or sales enquires: www.fireangel.eu

GN4620R1