


WTSL WIRELESS TEST SILENCE LOCATE CONTROL UNIT


Battery type 10 year sealed for life

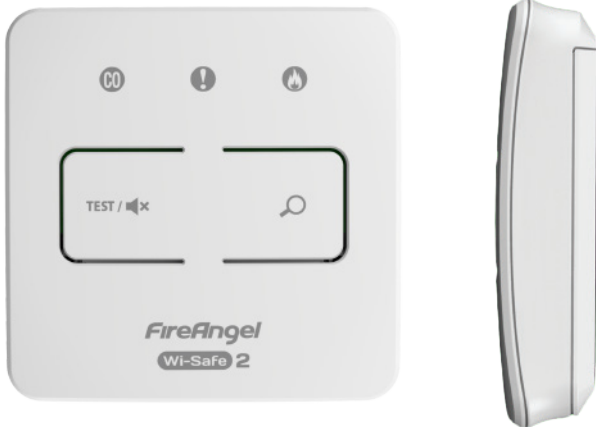

- 10 year sealed for life alkaline battery.
- Separate fire and CO alarm identifications.
- A remote interface for up to 50 **Wi-Safe 2** units.
- Test function - allows you to test all interlinked alarms from one centralised location.
- Silence function - silence all interlinked smoke and heat alarms. An alarm cannot be silenced if CO has been detected, however the locate function allows the initiating CO alarm to be located.
- Locate function - silence all wirelessly interlinked alarms except the initiating alarm.
- Memory function - if one of the alarm indicators is flashing every 10 seconds a smoke, heat or CO alarm has been activated.

CE Wi-Safe 2 module contained within WTSL-SN-1 independently tested to ETSI EN 300 220-2 V2.4.1, ETSI EN 301 489-1 V1.9.2, ETSI EN 301 489-3 V1.6.1

Technical Specification

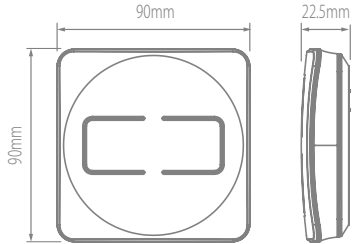Dimensions	90mm (width) x 90mm (height) x 22.5mm (depth)	
Supply voltage	3VDC	
Battery	10 year sealed for life alkaline battery	
Installation positions	Wall / Portable	
Operating temperature	+4°C to +38°C	
Operating humidity	Up to 90% RH non-condensing	
Storage temperature	-20°C to +60°C	
Storage humidity	Up to 93% RH non-condensing	
Plastic material	ABS, UL94 VO fire retardant	
Warranty	5 years	
Weight	142g	
Certified to	N/A	
Independently tested to	ETSI EN 300 220-2 V2.4.1, ETSI EN 301 489-1 V1.9.2, ETSI EN 301 489-3 V1.6.1	
Maximum number of connected units	50 wireless units	
Operating Frequency	868 MHz	
Range	35m (over 200m in clear air)	