



Connecting globally



**FLAME-X 950**

## TELE-FONIKA KABLE SA (DMCC Branch).

is the Regional Middle East Sales Office of Tele-Fonika Kable S.A. from Poland, 4-th largest manufacturer of electric cables and wires in Europe who supplies its products to GCC states (UAE, Saudi Arabia, Kuwait, Qatar, Oman and Bahrain) and other countries in Middle and Far East Region.

TELE-FONIKA Kable SA (DMCC Branch) was established in June 2015 to support the sales and marketing activity of TF Kable as well as to ensure prompt and professional service to our customers, provided by our specialized and experienced team.

We are located in Dubai's central business location Jumeirah Lake Towers (JLT) on Dubai-Abu Dhabi highway at main Almas Tower (Cluster A), which is also an operating place of DMCC Free-zone & Licensing authority.

### **Our strengths**

We are constantly developing our business in GCC States, rest of Middle East and India with specialized products dedicated for Oil&Gas, Mining, Marine Industry, Railways / underground Metros and Energy sector. We are also closely cooperating with authorized distributors who keep the stock of our fast moving items, such as Flexible HO7RN-F, Fire Resistant cables (Flame-X 950) or shipboard cables to react immediately for market needs.

### **Factory Approvals**

Our Flame-X 950 fire resistant cables are designed for life saving, fire fighting and detection systems, so it is critically important these cables are designed and manufactured in internationally approved laboratories. You can trust TELE-FONIKA Kable, as our factory management system is approved to ISO9001 for Quality, ISO14001 for Environmental and OHSAS for Health & Safety.

### **Certificates**

For your safety and peace of mind, our Flame-X 950 fire resistant cables have been tested, verified and approved by the independent third party laboratories of BASEC and LPCB (UK) and also approved by Civil Defence Authorities of GCC countries.



# Table of Contents

---

4 TELE-FONIKA Kable Group

---

6 FLAME-X 950 SERIES 1

---

11 FLAME-X 950 SERIES 2

---

16 FLAME-X 950 SERIES 2e

---

20 FLAME-X 950 SERIES 3

---

25 FLAME-X 950 SERIES 4

---

30 FLAME-X 950 SERIES 6

---

# Experience and competence of the TELE-FONIKA Kable Group

---


4

The Group TELE-FONIKA Kable (TF Kable) is ranked in the forefront of the global cable industry.

The Group is the fourth manufacturer of cables and wires in Europe with significant development potential, based entirely on Polish capital.

TELE-FONIKA Kable Group's considerable investment in research and development centers and multi-skilled work teams, which have included eminent scientists working with our specialists, has been rewarded by the introduction of new-generation products and comprehensive services in the field of cable engineering. Products manufactured in our plants are sold in over 90 countries.

Our product assortment includes 25 thousand cable types. The highest quality of our products is confirmed by over 460 certificates for groups of wares licensed by 34 renown centres of certifications worldwide. The company combines the good traditions of the cable industry in Poland and innovative technical solutions. TELE-FONIKA Kable Group consists of six plants – four in Poland, one in Ukraine, and one in Serbia. We own over a dozen trade agencies abroad, reaching customers in several dozen countries around the world.

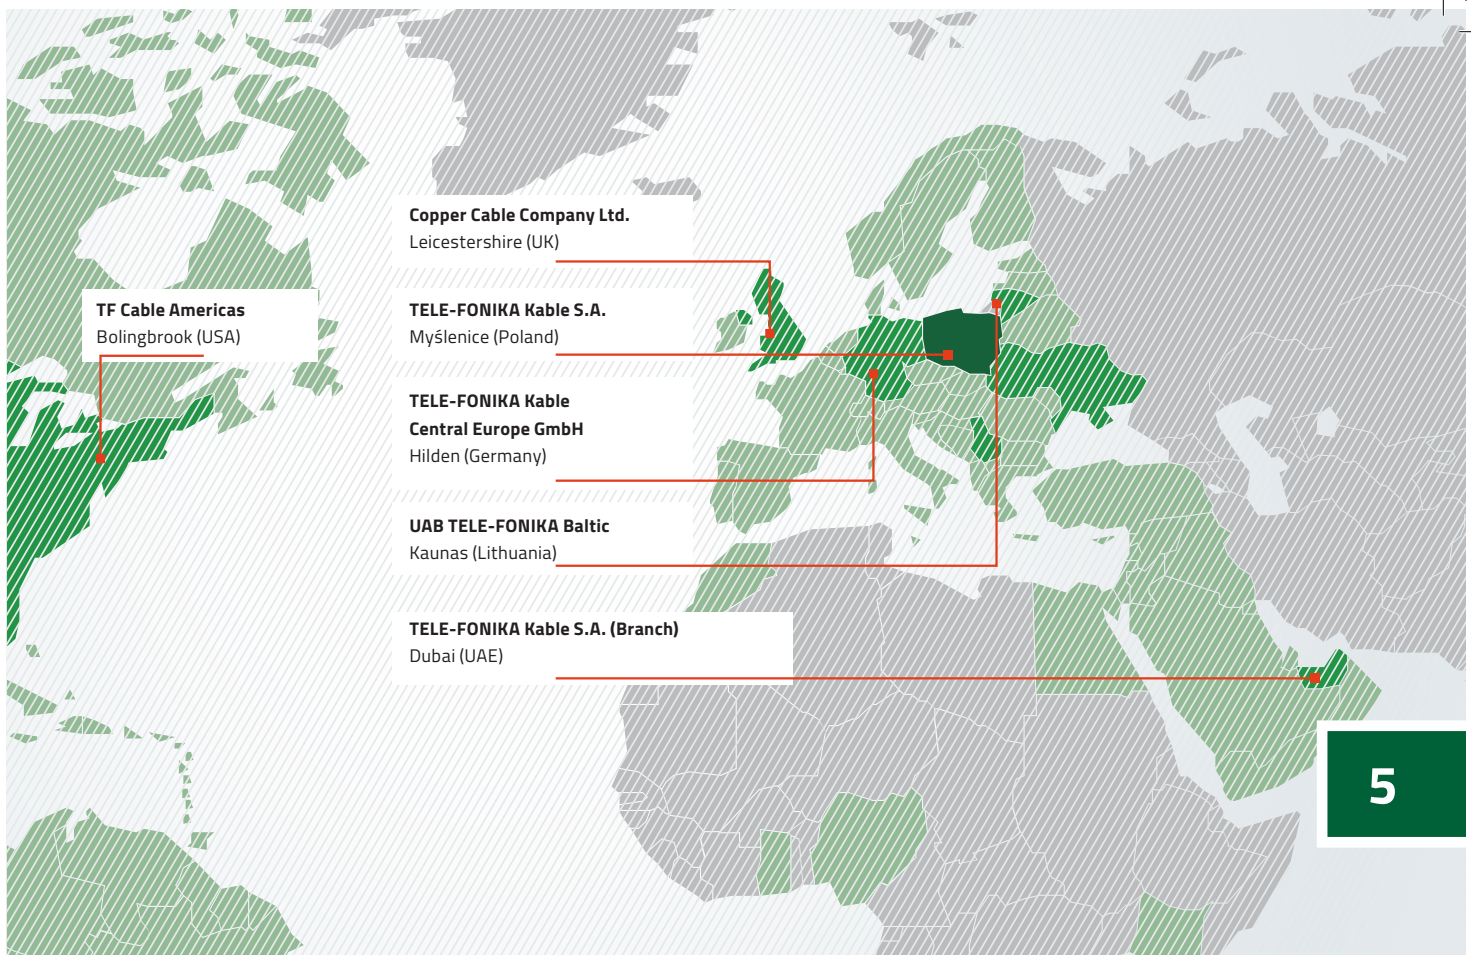

**Kraków-Wielicka plant** – production of PVC or XLPE insulated 1 kV cables with copper or aluminium conductor, screened or armoured types, fire resistant and halogen free cables, overhead conductors as well as rubber insulated and/or rubber sheathed cables with voltage up to 30kV for heavy industry, signaling and control cables for special applications.

**Kraków-Bieżanów plant** – production of PCV or XLPE insulated copper wires and cables up to 1 kV, halogen free and fire resistant types and copper or silver-copper overhead conductors for railway traction.

**Bydgoszcz plant** – the largest in Europe production center of medium, high and extra high voltage cables with voltage up to 500 kV

**Myślenice plant** – production copper and fiber optic telecommunication cables, data telecommunication cables and automotive wires

**Zajecar plant (Serbia)** – production of low and medium voltage cables, signaling and control cables, telecommunication cables, as well as halogen-free cables and wires

**Czernihiv plant (Ukraine)** – production of copper wires and cables up to 1 kV, fire resistant and flame retardant cables as well as insulated overhead aluminum conductors.


**Bukowno-Poland plant (recycling of cable waste)** – with the recycling capacity of approx. 10 thousand tons of cable waste per year. This allows for the recovery of fractions from individual materials with purity of over 99.5%

**Fire Test Laboratory in the Krakow-Wielicka production plant** – equipped with special apparatus that enables to provide flame propagation test on bundled cables, smoke density test as well as circuit integrity test with water or mechanical shock, test for corrosive gases emission.

**Laboratory of High and Extreme Voltages in the production plant in Bydgoszcz** – equipped with 4 Faraday cages and research filed for qualification tests for cables and systems up to 500 kV



BS 6387, IEC 60331-21  
Cert No. 814c



# FLAME-X 950 SERIES 1

(FLAME-X 950 Single) **600/1000V**

Based on EN 50525-3-41 , BS 6387

Single core non-sheathed fire resistant cable having low emission of smoke and corrosive gases when affected by fire

6

## CONSTRUCTION

<b>Conductors:</b>	Circular or compacted circular, stranded, annealed copper conductor, class 2 acc. to BS EN 60228
<b>Primary insulation:</b>	Fire resistant mica tape with a glass cloth
<b>Insulation:</b>	Special thermosetting LSOH compound of EI5 type acc. to BS EN 50363-5



## CHARACTERISTICS

<b>Core identification:</b>	Green/yellow, blue, black, brown, grey, red, yellow. Other colours are available on special request.
<b>Maximum conductor operating temperature:</b>	+90°C
<b>Lowest installation temperature:</b>	-5°C
<b>Maximum short-circuit conductor temperature:</b>	+250°C
<b>Minimum bending radius:</b>	6 × D D – overall diameter of the cable

# FLAME-X 950 SERIES 1

(Flame-X 950 Single) **600/1000V**

7

## Fire performance

Fire resistance:	IEC 60331-21 BS 6387 <sup>1)</sup>	Circuit integrity - tested 90 min. at 950°C Category <b>C</b> – resistance to fire: 3 h at 950°C Category <b>W</b> – resistance to fire with water: 15 min at 650°C plus 15 min with water spray Category <b>Z</b> – resistance to fire with mechanical shock: 15 min at 950°C
Flame propagation:	BS EN 60332-1-2	
Smoke density:	BS EN 61034-2	
Corrosive and acid gases emission:	BS EN 60754-1 <sup>2)</sup> BS EN 60754-2 <sup>2)</sup>	HCl content < 0.5% pH ≥ 4.3 & conductivity ≤ 10 μSmm <sup>-1</sup>

<sup>1)</sup> Category C, W, Z for cables up to and including 95 mm<sup>2</sup>. Category C for cables above and including 120 mm<sup>2</sup>.

<sup>2)</sup> BS EN 60754-1 & BS EN 60754-2 standards replace BS EN 50267-2-1

## Applications

For use in fixed installations, where cable is protected by conduit or trunking.  
Fire resistant cables intended to provide circuit integrity in case of fire.

Standard length cable packing:	100 m in coils or on spools, or 500 m on drums. Other forms of packing and delivery are available on request.
--------------------------------	------------------------------------------------------------------------------------------------------------------

## Approvals

LPCB	1,5 mm <sup>2</sup> to 500 mm <sup>2</sup> single-core
------	--------------------------------------------------------

# FLAME-X 950 SERIES 1

(Flame-X 950 Single) **600/1000V**

## 8

### Technical and Electrical Characteristics

Nominal cross-sectional area of conductor	Radial thickness of insulation	Approximate overall diameter	Approximate net weight	Maximum resistance of conductor at temperature 20°C
mm <sup>2</sup>	mm	mm	mm	Ω/km
1.5	0.7	3.90	25.3	12.1
2.5	0.8	4.60	38	7.41
4	0.8	5.10	53	4.61
6	0.8	5.40	71	3.08
10	1.0	6.70	116	1.83
16	1.0	7.80	173	1.15
25	1.2	9.60	270	0.727
35	1.2	10.60	361	0.524
50	1.4	12.30	490	0.387
70	1.4	13.70	683	0.268
95	1.6	16.10	942	0.193
120	1.6	17.50	1171	0.153
150	1.8	19.50	1445	0.124
185	2.0	21.40	1800	0.0991
240	2.2	24.3	2338	0.0754
300	2.4	26.50	2918	0.0601
400	2.6	29.60	3766	0.0470
500	2.8	33.20	4810	0.0366



# FLAME-X 950 SERIES 1

(Flame-X 950 Single) **600/1000V**

## Current Ratings and Voltage Drop

Nominal cross-sectional area of conductor	Short circuit current ratings (1 sec)	Current Rating* Two cables, single phase A.C. or D.C.	Current Rating* Three or four cables, three phase A.C.	Voltage Drop** Two cables D.C.	Voltage Drop** Two cables, single phase A.C.	Voltage Drop** Three or four cables, three phase A.C.
mm <sup>2</sup>	Amps	Amps	Amps	mV/A/m	mV/A/m	mV/A/m
1.5	210	22	19	31	31	27
2.5	350	30	26	19	19	16
4	570	40	35	12	12	10
6	850	51	45	7.9	7.9	6.8
10	1400	71	63	4.7	4.7	4.0
16	2200	95	85	2.9	2.9	2.5
25	3600	126	111	1.85	1.90	1.65
35	5000	156	138	1.35	1.35	1.15
50	6800	189	168	0.99	1.05	0.90
70	9800	240	214	0.68	0.75	0.65
95	13600	290	259	0.49	0.58	0.50
120	17200	336	299	0.39	0.48	0.42
150	21100	375	328	0.32	0.43	0.37
185	26500	426	370	0.25	0.37	0.32
240	34900	500	433	0.190	0.33	0.29
300	43700	573	493	0.155	0.31	0.27
400	55900	683	584	0.120	0.29	0.25
500	70600	783	666	0.093	0.28	0.24

\* Installation reference method 3 (enclosed in conduit on a wall or in trunking etc.) as per BS 7671, Appendix 4, Conductor operating temperature 90°C, Ambient temperature 30°C

\*\* Installation reference methods 3 and 4 (enclosed in conduit, etc., in or on a wall) as per BS 7671, Appendix 4, Conductor operating temperature 90°C, Ambient temperature 30°C

# FLAME-X 950 SERIES 1

(Flame-X 950 Single) **600/1000V**

10

## Correction Factors for Ambient Temperature

Ambient Temperature, °C	25	30	35	40	45	50	55	60	65	70	75	80	85
Correction Factor	1.02	1.00	0.96	0.91	0.87	0.82	0.76	0.71	0.65	0.58	0.50	0.41	0.29

## Correction Factors for Groups

Number of Circuits	2	3	4	5	6	7	8	9	10	12	14	16	18
Correction Factor	0.80	0.70	0.65	0.60	0.57	0.54	0.52	0.50	0.48	0.45	0.43	0.41	0.39

All the information contained in this document - including tables and diagrams - is given in good faith and believed to be correct at the time of publication. The information does not constitute a warranty nor representation for which TELE-FONIKA Kable assumes legal responsibility. TELE-FONIKA Kable reserves rights to introduce changes to the document at any time.



BS 7846  
Cert No. 814a, 814f



# FLAME-X 950 SERIES 2

(Flame-X 950 Standard) **300/500V**

BS 7629-1, BS 6387, BS 5839-1

Fire resistant screened cables having low emission of smoke and corrosive gases when affected by fire

## CONSTRUCTION

<b>Conductors:</b>	Plain annealed copper solid class 1 (for 1 – 2.5 mm <sup>2</sup> ) and stranded class 2 ( for 4 mm <sup>2</sup> ) acc. to BS EN 60228
<b>Uninsulated circuit protective conductor:</b>	Tinned annealed copper of the same nominal cross-sectional area and of the same class as the insulated conductors
<b>Drain wire:</b>	Tinned annealed copper wires class 2 acc. to BS EN 60228 ( for cables with 7, 12, 19 – cores)
<b>Insulation:</b>	Special cross-linked heat resistant compound type EI2 acc. to BS EN 50363-1
<b>Optional binder:</b>	Non hygroscopic halogen free tape
<b>Screen:</b>	Aluminium/polyester laminated tape and uninsulated circuit protective conductor or drain wire
<b>Outer sheath:</b>	Thermoplastic zero halogen low smoke compound type LTS 3 acc. to BS 7655-6.1
<b>Colour of sheath:</b>	Red or white (other colours are permissible when agreed with the manufacturer)
<b>Core identification:</b>	2 core + ECC: brown, blue 3 core + ECC: brown, black, grey 4 core + ECC: blue, brown, black, grey 7, 12, 19 – core + Drain wire: numbering or for identification by colour: in each layer: brown (starting core), black (reference core)



11

## CHARACTERISTICS

<b>Maximum conductor operating temperature:</b>	+70°C
<b>Minimum operating temperature (for fixed application) after installation without movement:</b>	-40°C
<b>Lowest installation temperature:</b>	0°C
<b>Maximum short-circuit conductor temperature:</b>	+250°C
<b>Minimum bending radius:</b>	6 × D; (D - overall cable diameter)

# FLAME-X 950 SERIES 2

## (Flame-X 950 Standard) 300/500V

12

### Fire performance

Resistance to fire:	BS 6387 Category <b>C</b> – resistance to fire: 3 h at 950°C (IEC 60331)  Category <b>W</b> – resistance to fire with water: 15 min at 650°C plus 15 min with water spray  Category <b>Z</b> – resistance to fire with mechanical shock: 15 min at 950°C  BS EN 50200 Class PH30 (resistance to fire, with mechanical shock and with water: 30 min)  BS 5839-1:2002 Clause 26.2d PH 30 Standard fire resistant cable
Flame propagation:	BS EN 60332-1-2 (IEC 60332-1-2) and BS EN 50266-2-2 (IEC 60332-3-22)
Smoke density:	BS EN 61034-2 (IEC 61034-2)
Gases evolved during combustion:	BS EN 50267-2-1 (IEC 61034-2): < 0.5% acid gas BS EN 50267-2-2 (IEC 60754-2): pH ≥ 4.3; conductivity ≤ 10 μSmm <sup>-1</sup>

### Applications

Installations emergency lighting and evacuation systems, fire and smoke detection systems, air-conditioning and alarm systems, automatic elevator doors, computer control rooms, offshore and marine emergency systems, emergency evacuation communicators.

Standard length cable packing:	500 or 1,000 m on drums. Other forms of packing and delivery are available on request.
--------------------------------	-------------------------------------------------------------------------------------------

### Approvals

LPCB	1 mm <sup>2</sup> to 4 mm <sup>2</sup> 2-core, 3-core, 4-core
------	---------------------------------------------------------------

# FLAME-X 950 SERIES 2

## (Flame-X 950 Standard) 300/500V

### Technical and Electrical Characteristics

Number and cross-sectional area of conductor	Conductor class	Nominal cross-sectional area of protective conductor ECC	Approximate overall diameter	Approximate net weight of cables	Maximum conductor resistance at temperature 20°C	Maximum ECC conductor resistance at 20°C
<b>n × mm<sup>2</sup></b>		<b>mm<sup>2</sup></b>	<b>mm</b>	<b>kg/km</b>	<b>Ω/km</b>	<b>Ω/km</b>
2 × 1 RE + ECC	1	1	6.9	65	18.1	18.2
2 × 1.5 RE + ECC	1	1.5	7.8	86	12.1	12.2
2 × 1.5 RM + ECC*	2	1.5	8.2	91	12.1	12.2
2 × 2.5 RE + ECC	1	2.5	9.2	126	7.41	7.56
2 × 2.5 RM + ECC*	2	2.5	9.7	134	7.41	7.56
2 × 4 RM + ECC	2	4	10.9	187	4.61	4.70
2 × 6 RM + ECC*	2	6	12.0	251	3.08	3.11
3 × 1 RE + ECC**	1	1	7.3	81	18.1	18.2
3 × 1.5 RE + ECC	1	1.5	8.3	108	12.1	12.2
3 × 2.5 RE + ECC	1	2.5	9.7	160	7.41	7.56
3 × 4 RM + ECC	2	4	11.6	239	4.61	4.70
4 × 1 RE + ECC**	1	1	8.2	102	18.1	18.2
4 × 1.5 RE + ECC	1	1.5	9.5	138	12.1	12.2
4 × 1.5 RM + ECC*	1	1.5	10.2	147	12.1	12.2
4 × 2.5 RE + ECC	1	2.5	11.5	205	7.41	7.56
4 × 4 RM + ECC	2	4	14.6	310	4.61	4.70

\* based on norm. without certificate    \*\* without standards

# FLAME-X 950 SERIES 2

## (Flame-X 950 Standard) 300/500V

14

### Technical and Electrical Characteristics

Number and cross-sectional area of conductor	Conductor class	Nominal cross-sectional area of drain wire	Approximate overall diameter	Approximate net weight of cables	Maximum conductor resistance at 20°C	Maximum drain wire resistance at 20°C
<b>n × mm<sup>2</sup></b>		<b>mm<sup>2</sup></b>	<b>mm</b>	<b>kg/km</b>	<b>Ω/km</b>	<b>Ω/km</b>
7 × 1 RE**	1	0.5	10.4	150	18.1	36.7
7 × 1.5 RE	1	0.5	12.0	207	12.1	36.7
7 × 2.5 RE	1	0.5	13.9	300	7.41	36.7
12 × 1 RE**	1	0.5	13.6	247	18.1	36.7
12 × 1.5 RE	1	0.5	15.5	333	12.1	36.7
12 × 2.5 RE	1	0.5	18.3	496	7.41	36.7
19 × 1 RE*	1	0.5	15.7	356	18.1	36.7
19 × 1.5 RE	1	0.5	18.1	496	12.1	36.7

\* based on norm. without certificate    \*\* without standards

### Current ratings and voltage drop

Ambient air temperature: 30°C. Conductor operating temperature: 70°C.  
Installation as specified in Appendix 4 of BS 7671 IEE Wiring Regulations

# FLAME-X 950 SERIES 2

## (Flame-X 950 Standard) 300/500V

### Reference Method 1

(clipped direct)

Nominal area of conductor	1 two core cable* single phase A.C. or D.C.		1 three-core or 1 four-core cable*. three-phase A.C.	
	Current rating	Volts drop per ampere par metre	Current rating	Volts drop per ampere par metre
mm <sup>2</sup>	A	mV/m	A	mV/m
1.0	15	44	13.5	38
1.5	19.5	29	17.5	25
2.5	27	18	24	15
4.0	36	11	32	9.5
6.0	46	7.3	41	6.4

### Reference Method 3

(enclosed in conduit on a wall or ceiling, or in trunking)

Nominal area of conductor	1 two core cable* single phase A.C. or D.C.		1 three-core or 1 four-core cable*. three-phase A.C.	
	Current rating	Volts drop per ampere par metre	Current rating	Volts drop per ampere par metre
mm <sup>2</sup>	A	mV/m	A	mV/m
1.0	13	44	11.5	38
1.5	16.5	29	15	25
2.5	23	18	20	15
4.0	30	11	27	9.5
6.0	38	7.3	34	6.4

\* with protective conductor


### Rating factors for ambient temperature

Ambient temperature, °C	25	30	35	40	45	50
Rating factor	1.03	1.00	0.94	0.87	0.79	0.71

All the information contained in this document - including tables and diagrams - is given in good faith and believed to be correct at the time of publication. The information does not constitute a warranty nor representation for which TELE-FONIKA Kable assumes legal responsibility. TELE-FONIKA Kable reserves rights to introduce changes to the document at any time.



BS 7846  
Cert No. 814b, 814g



# FLAME-X 950 SERIES 2e

## (Flame-X 950 Enhanced) 300/500V

BS 7629-1, BS 6387, BS 5839-1

“Enhanced” grade fire resistant electric cables having low emission of smoke and corrosive gases when affected by fire

### 16

## CONSTRUCTION

<b>Conductors:</b>	Plain annealed copper solid class 1 (for 1 - 2.5 mm <sup>2</sup> ) and stranded class 2 (for 4 mm <sup>2</sup> ) acc. to BS EN 60228 and special request
<b>Primary insulation:</b>	Fire resistant mica tape with a glass cloth
<b>Insulation:</b>	Special cross-linked heat resistant compound type EI2 acc. to BS EN 50363-1
<b>Screen:</b>	Helically applied aluminium / polyester tape and uninsulated circuit protective conductor
<b>Uninsulated circuit protective conductor:</b>	Tinned annealed copper conductor of the same nominal cross-sectional area and of the same class as the insulated conductors
<b>Outer sheath:</b>	Thermoplastic zero halogen low smoke compound type LTS 3 acc. to BS 7655-6.1
<b>Colour of sheath:</b>	Red or white. Other colours are available on special request.
<b>Core identification:</b>	2 core + ECC: brown, blue 3 core + ECC: brown, black, grey 4 core + ECC: blue, brown, black, grey



## CHARACTERISTICS

<b>Maximum conductor operating temperature:</b>	+70°C
<b>Minimum operating temperature (for fixed application) after installation without movement:</b>	-40°C
<b>Lowest installation temperature:</b>	0°C
<b>Maximum short-circuit conductor temperature:</b>	+250°C
<b>Minimum bending radius:</b>	6 × D; (D - overall cable diameter)



# FLAME-X 950 SERIES 2e

## (Flame-X 950 Enhanced) 300/500V

### Fire performance

<b>Resistance to fire:</b>	Complies with the PH 120 ENHANCED fire resistant cable described in Clause 26.2 of BS 5839-1 BS 6387 Category <b>C</b> – resistance to fire: 3 h at 950°C (IEC 60331) Category <b>W</b> – resistance to fire with water: 15 min at 650°C plus 15 min with water spray Category <b>Z</b> – resistance to fire with mechanical shock: 15 min at 950°C  EN 50200 - PH 120 BS 8434-2 - 120 min
<b>Flame propagation:</b>	BS EN 60332-1-2 (IEC 60332-1-2) and BS EN 50266-2-2 (IEC 60332-3-22)
<b>Smoke density:</b>	BS EN 61034-2 (IEC 61034-2)
<b>Gases evolved during combustion:</b>	BS EN 50267-2-1 (IEC 61034-2): < 0.5% acid gas BS EN 60754-22) pH ≥ 4.3 & conductivity ≤ 10 μSmm <sup>-1</sup>

17

### Applications (Flame-X 950 2e)

For use in installations emergency lighting and evacuation systems, fire and smoke detection systems, air-conditioning and alarm systems, automatic elevator doors, computer control rooms, emergency evacuation communicators. Recommended for systems, in particular building types, in which cables might need to operate correctly during a fire for periods in excess of those normally required for single phase evacuation of a building. Cables can be used in buildings higher than 30 m, with four or more evacuation zones.

<b>Standard length cable packing</b>	500 or 1,000 m on drums. Other forms of packing and delivery are available on request.
--------------------------------------	-------------------------------------------------------------------------------------------

### Approvals

<b>LPCB</b>	1 mm <sup>2</sup> to 4 mm <sup>2</sup> 2-core, 3-core, 4-core and 1 mm <sup>2</sup> to 2,5 mm <sup>2</sup> 7-core 1,5 mm <sup>2</sup> to 2,5 mm <sup>2</sup> 12-core and 1,5 mm <sup>2</sup> 19-core
-------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

# FLAME-X 950 SERIES 2e

(Flame-X 950 Enhanced) 300/500V

18

## Technical and Electrical Characteristics

Number and cross-sectional area of conductor	Conductor class	Nominal cross-sectional area of protective conductor ECC	Approximate overall diameter	Approximate net weight of cables	Maximum conductor resistance at 20°C	Maximum ECC conductor resistance at 20°C
n × mm <sup>2</sup>		mm <sup>2</sup>	mm	kg/km	Ω/km	Ω/km
2 × 1 RE + ECC	1	1	8.1	77	18.1	18.2
2 × 1.5 RE + ECC	1	1.5	9.0	99	12.1	12.2
2 × 1.5 RM + ECC*	2	1.5	9.4	104	12.1	12.2
2 × 2.5 RE + ECC	1	2.5	10.4	142	7.41	7.56
2 × 2.5 RM + ECC*	2	2.5	10.9	148	7.41	7.56
2 × 4 RM + ECC	2	4	12.1	202	4.61	4.70
3 × 1 RE + ECC**	1	1	8.6	96	18.1	18.2
3 × 1.5 RE + ECC	1	1.5	9.6	126	12.1	12.2
3 × 2.5 RE + ECC	1	2.5	11.0	180	7.41	7.56
3 × 4 RM + ECC	2	4	12.9	258	4.61	4.70
4 × 1 RE + ECC**	1	1	9.5	121	18.1	18.2
4 × 1.5 RE + ECC	1	1.5	10.8	159	12.1	12.2
4 × 2.5 RE + ECC	1	2.5	12.8	230	7.41	7.56
4 × 2.5 RM + ECC*	2	2.5	13.7	242	7.41	7.56
4 × 4 RM + ECC	2	4	15.9	333	4.61	4.70

\* based on norm, without certificate    \*\* without standards

## Current ratings and voltage drop

Ambient air temperature: 30°C. Conductor operating temperature: 70°C.  
Installation as specified in Appendix 4 of BS 7671 IEE Wiring Regulations

# FLAME-X 950 SERIES 2e

## (Flame-X 950 Enhanced) 300/500V

### Reference Method 1

(clipped direct)

Nominal area of conductor	1 two core cable* single phase A.C. or D.C.		1 three-core or 1 four-core cable*. three-phase A.C.	
	Current rating	Volts drop per ampere par metre	Current rating	Volts drop per ampere par metre
mm <sup>2</sup>	A	mV/m	A	mV/m
1.0	15	44	13.5	38
1.5	19.5	29	17.5	25
2.5	27	18	24	15
4.0	36	11	32	9.5

### Reference Method 3

(enclosed in conduit on a wall or ceiling, or in trunking)

Nominal area of conductor	1 two core cable* single phase A.C. or D.C.		1 three-core or 1 four-core cable*. three-phase A.C.	
	Current rating	Volts drop per ampere par metre	Current rating	Volts drop per ampere par metre
mm <sup>2</sup>	A	mV/m	A	mV/m
1.0	13	44	11.5	38
1.5	16.5	29	15	25
2.5	23	18	20	15
4.0	30	11	27	9.5

\* with protective conductor

### Rating factors for ambient temperature

Ambient temperature, °C	25	30	35	40	45	50
Rating factor	1.03	1.00	0.94	0.87	0.79	0.71


### Correction factors for groups

Number of cables in grouping	2	3	4	5	6	7	8	9	10
Rating factor	0.80	0.70	0.65	0.60	0.57	0.54	0.52	0.50	0.48

All the information contained in this document - including tables and diagrams - is given in good faith and believed to be correct at the time of publication. The information does not constitute a warranty nor representation for which TELE-FONIKA Kable assumes legal responsibility. TELE-FONIKA Kable reserves rights to introduce changes to the document at any time.



BS 6387, IEC 60331-21  
Cert No. 1354b, 1354d

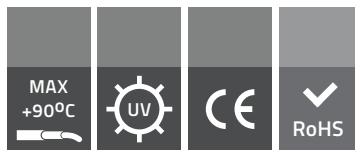

# FLAME-X 950 SERIES 3

## 600/1000V

Based on BS 7846, BS 6387

Fire resistant security power cable having low emission of smoke and corrosive gases when affected by fire

20

### CONSTRUCTION

<b>Conductors:</b>	Circular, circular compacted or shaped, stranded, annealed copper conductor, class 2 acc. to BS EN 60228
<b>Primary insulation:</b>	A suitable wrapping of mica tape with a glass cloth
<b>Insulation:</b>	Cable 1 to 16 mm <sup>2</sup> - special thermosetting low smoke zero halogen compound type EI5 acc. to BS 50363-5 Cable 25 to 1,000 mm <sup>2</sup> - cross-linked polyethylene (XLPE) of GP8 type acc. to BS 7655-1.3
<b>Bedding:</b>	Special low smoke zero halogen filling compound (only 2, 3, 4 cores)
<b>Outer sheath:</b>	Thermoplastic LSOH compound of LTS1 type acc. to BS 7655-6.1



### CHARACTERISTICS

<b>Nominal voltage:</b>	0.6/1kV	
<b>Colour of sheath:</b>	Black. Other colours are available on special request.	
<b>Core identification:</b>	As per old IEEE regulations	As per new IEEE regulations
	1 core: black	blue
	2 core: red, black	brown, blue
	3 core: red, yellow, blue	brown, black, grey
	4 core: red, yellow, blue, black	blue, brown, black, grey
	5 core: red, yellow, blue, black, gn/yellow	gn/yellow, blue, brown, black, grey
	*We can offer both old or new IEEE regulation core colors	
<b>Maximum conductor operating temperature:</b>	+90°C	
<b>Lowest installation temperature:</b>	0°C	
<b>Minimum operating temperature after installation without movement:</b>	-40°C	

# FLAME-X 950 SERIES 3

## 600/1000V

Maximum short-circuit conductor temperature:	+250°C
Minimum bending radius:	6 × D for cables with circular copper conductors and 8 × D for cables with shaped copper conductors; D – overall diameter of the cable

21

## Fire performance

Fire resistance: (additional TF test)	BS 7846 p. 17.4.2	Category <b>F2</b>
	IEC 60331-21	Circuit integrity - tested 90 min. at 950°C
BS EN 60754-22) pH ≥ 4.3 & conductivity ≤ 10 μSmm <sup>-1</sup>	BS 6387 <sup>1)</sup>	Category <b>C</b> – resistance to fire: 3 h at 950°C
		Category <b>W</b> – resistance to fire with water: 15 min at 650°C plus 15 min with water spray
		Category <b>Z</b> – resistance to fire with mechanical shock: 15 min at 950°C
Flame propagation:	BS EN 60332-1-2	
	BS EN 60332-3-24	
Smoke density:	BS EN 61034-2	

1) Category C, W, Z for cables up to and including 500 mm<sup>2</sup>.

2) BS EN 60754-1 & BS EN 60754-2 standards replace BS EN 50267-2-1

## Applications

Fire resistant cables for use in fixed installations in industrial areas, public buildings (as for example power plants, hospitals, shopping centres, theatres) and similar applications where maintenance of power supply during a fire is required for a defined period of time.

Corrosive and acid gases emission:	BS EN 60754-1 <sup>2)</sup> HCl content < 0.5% BS EN 60754-2 <sup>2)</sup> pH ≥ 4.3 & conductivity ≤ 10 μSmm <sup>-1</sup>
------------------------------------	-------------------------------------------------------------------------------------------------------------------------------

## Approvals

Standard length cable packing	500 or 1,000 m on drums. Other forms of packing and delivery are available on request.
-------------------------------	-------------------------------------------------------------------------------------------

# FLAME-X 950 SERIES 3

## 600/1000V

### Technical and Electrical Characteristics

22

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of bedding	Nominal thickness of outer sheath	Approx. overall diameter	Approx. net weight of cables	Maximum conductor resistance at 20°C	Current rating single-phase A.C. or D.C.*		Voltage Drop D.C.*	Voltage Drop single-phase A.C.*	Short circuit rating (1 sec)
							Clipped direct	Free Air			
n × mm <sup>2</sup>	mm	mm	mm	mm	kg/km	Ω/km	Amp	Amp	mV/A/m	mV/A/m	kA
1 × 1 RM	0.7	-	1.4	6.4	53	18.1	19	-	46	46	0.14
1 × 1.5 RM	0.7	-	1.4	6.7	61	12.1	25	-	31	31	0.21
1 × 2.5 RM	0.7	-	1.4	7.2	74	7.41	34	-	19	19	0.35
1 × 4 RM	0.7	-	1.4	7.7	93	4.61	46	-	12	12	0.57
1 × 6 RM	0.7	-	1.4	8	113	3.08	59	-	7.9	7.9	0.85
1 × 10 RM	0.7	-	1.5	9.1	162	1.83	81	-	4.7	4.7	1.4
1 × 16 RM	0.7	-	1.5	10.2	225	1.15	109	-	2.9	2.9	2.2
1 × 25 RM	0.9	-	1.6	12.2	325	0.727	143	135	1.85	1.85	3.5
1 × 35 RM	0.9	-	1.7	13.4	426	0.524	176	169	1.35	1.35	5
1 × 50 RM	0.9	-	1.8	15.1	563	0.387	228	207	0.99	1	7.1
1 × 70 RM	1.1	-	1.9	16.9	777	0.268	298	268	0.68	0.71	10
1 × 95 RM	1.1	-	2	19.1	1042	0.193	355	328	0.49	0.52	13.5
1 × 120 RM	1.2	-	2.1	20.9	1294	0.153	413	383	0.39	0.43	17.1
1 × 150 RM	1.4	-	2.2	23.1	1586	0.124	476	444	0.32	0.36	21.4
1 × 185 RM	1.6	-	2.4	25.4	1971	0.099	545	510	0.25	0.3	26.4
1 × 240 RM	1.7	-	2.6	28.3	2527	0.075	644	607	0.19	0.25	34.3
1 × 300 RM	1.8	-	2.6	30.5	3120	0.060	743	703	0.155	0.22	42.9
1 × 400 RM	2	-	2.8	34	4013	0.047	868	823	0.12	0.2	57.2
1 × 500 RM	2.2	-	3	38	5109	0.037	990	946	0.093	0.185	71.5
1 × 630 RM	2.4	-	3.2	43	6477	0.028	1130	1088	0.072	0.175	90.1
1 × 800 RM	2.6	-	3.4	48.1	8163	0.022	1288	1214	0.056	0.17	114.4
1 × 1000 RM	2.8	-	3.6	52	10100	0.018	1443	1349	0.045	0.165	134

# FLAME-X 950 SERIES 3

## 600/1000V

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of bedding	Nominal thickness of outer sheath	Approx. overall diameter	Approx. net weight of cables	Maximum conductor resistance at 20°C	Current rating single-phase A.C. or D.C.*		Voltage Drop D.C.*	Voltage Drop single-phase A.C.*	Short circuit rating (1 sec)
							Clipped direct	Free Air			
<b>n × mm<sup>2</sup></b>	<b>mm</b>	<b>mm</b>	<b>mm</b>	<b>mm</b>	<b>kg/km</b>	<b>Ω/km</b>	<b>Amp</b>	<b>Amp</b>	<b>mV/A/m</b>	<b>mV/A/m</b>	<b>kA</b>
2 × 1 RM	0.7	0.8	1.4	11.7	185	18.1	19	21	46	46	0.14
2 × 1.5 RM	0.7	0.8	1.4	12.2	208	12.1	24	26	31	31	0.21
2 × 2.5 RM	0.7	0.8	1.4	13.1	249	7.41	33	36	19	19	0.35
2 × 4 RM	0.7	0.8	1.4	14.1	304	4.61	45	49	12	12	0.57
2 × 6 RM	0.7	0.8	1.4	14.9	361	3.08	58	63	7-Sep	7.9	0.85
2 × 10 RM	0.7	0.8	1.5	16.9	497	1.83	80	86	4.7	4.7	1.4
2 × 16 RM	0.7	0.8	1.5	18.9	670	1.15	107	115	2.9	2.9	2.2
3 × 1 RM	0.7	0.8	1.4	12.2	203	18.1	17	18	-	40	0.14
3 × 1.5 RM	0.7	0.8	1.4	12.8	231	12.1	22	23	-	27	0.21
3 × 2.5 RM	0.7	0.8	1.4	13.8	281	7.41	30	32	-	16	0.35
3 × 4 RM	0.7	0.8	1.4	14.9	350	4.61	40	42	-	10	0.57
3 × 6 RM	0.7	0.8	1.4	15.7	423	3.08	52	54	-	6.8	0.85
3 × 10 RM	0.7	0.8	1.5	17.8	593	1.83	71	75	-	4	1.4
3 × 16 RM	0.7	0.8	1.6	20.2	826	1.15	96	100	-	2.5	2.2

# FLAME-X 950 SERIES 3

## 600/1000V

24

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of bedding	Nominal thickness of outer sheath	Approx. overall diameter	Approx. net weight of cables	Maximum conductor resistance at 20°C	Current rating single-phase A.C. or D.C.*		Voltage Drop D.C.*	Voltage Drop single-phase A.C.*	Short circuit rating (1 sec)
							Clipped direct	Free Air			
n × mm <sup>2</sup>	mm	mm	mm	mm	kg/km	Ω/km	Amp	Amp	mV/A/m	mV/A/m	kA
4 × 1 RM	0.7	0.8	1.4	13.2	233	18.1	17	18	-	40	0.14
4 × 1.5 RM	0.7	0.8	1.4	13.9	268	12.1	22	23	-	27	0.21
4 × 2.5 RM	0.7	0.8	1.4	14.9	328	7.41	30	32	-	16	0.35
4 × 4 RM	0.7	0.8	1.4	16.2	414	4.61	40	42	-	10	0.57
4 × 6 RM	0.7	0.8	1.5	17.2	513	3.08	52	54	-	6.8	0.85
4 × 10 RM	0.7	0.8	1.5	19.4	718	1.83	71	76	-	4	1.4
4 × 16 RM	0.7	0.8	1.6	22.1	1010	1.15	96	100	-	2.5	2.2

\* current ratings acc. to BS 7671 table 4E1A, 4E1B, 4E2A, 4E2B

### Rating factors for air temperature

LPCB	1 mm <sup>2</sup> to 1,000 mm <sup>2</sup> 1-core and 1 mm <sup>2</sup> to 16 mm <sup>2</sup> 2-core, 3-core, 4-core							
Ambient air temperature, °C	25	30	35	40	45	50	55	60
Rating factors	1.02	1.0	0.96	0.91	0.87	0.82	0.76	0.71

All the information contained in this document - including tables and diagrams - is given in good faith and believed to be correct at the time of publication. The information does not constitute a warranty nor representation for which TELE-FONIKA Kable assumes legal responsibility. TELE-FONIKA Kable reserves rights to introduce changes to the document at any time.





BS 7846  
Cert No. 814d; 1354c



# FLAME-X 950 SERIES 4

## 600/1000V

BS 7846 - F2

Armoured fire resistant electric power and control cable having low emission of smoke and corrosive gases when affected by fire

### CONSTRUCTION

<b>Conductors:</b>	Circular, circular compacted or shaped, stranded, annealed copper conductor, class 2 acc. to BS EN 60228
<b>Primary insulation:</b>	A suitable wrapping of mica tape with a glass cloth
<b>Insulation:</b>	Cross-linked polyethylene (XLPE) of GP8 type acc. to BS 7655-1.3
<b>Bedding:</b>	Special low smoke zero halogen (LSOH) compound
<b>Armour:</b>	Single layer of galvanized steel wires applied helically over the bedding
<b>Outer sheath:</b>	Thermoplastic halogen free compound (LSOH) of LTS1 type acc. to BS 7655-6.1



25

### CHARACTERISTICS

<b>Colour of sheath:</b>	Black. Other colours are available on special request.	
<b>Core identification:</b>	As per old IEEE regulations	As per new IEEE regulations
	1 core: black	blue
	2 core: red, black	brown, blue
	3 core: red, yellow, blue	brown, black, grey
	4 core: red, yellow, blue, black	blue, brown, black, grey
	5 core: red, yellow, blue, black, gn/yellow	gn/yellow, blue, brown, black, grey
	*We can offer both old or new IEEE regulation core colors	
<b>Maximum conductor operating temperature:</b>	+90°C	
<b>Lowest installation temperature:</b>	0°C	
<b>Minimum operating temperature after installation without movement:</b>	-40°C	
<b>Maximum short-circuit conductor temperature:</b>	+250°C	
<b>Fire resistance:</b>	Category F2 acc. to BS 7846, BS 6387 – Category C, W, Z	
<b>Flame propagation:</b>	BS EN 60332-1-2, EN 60332-3-24	
<b>Low smoke emission:</b>	BS EN 61034-2	

# FLAME-X 950 SERIES 4

## 600/1000V

Low corrosive and acid gas emission:	BS EN 60754-1, HCl content < 0.5% BS EN 60754-22) pH $\geq$ 4.3 & conductivity $\leq$ 10 $\mu$ Smm <sup>-1</sup>
Minimum bending radius:	6 $\times$ D for cables with circular copper conductors and 8 $\times$ D for cables with shaped copper conductors; D – overall diameter of the cable

26

## Applications

Fire resistant armoured cables for use in fixed installations in industrial areas, public buildings (as for example power plants, hospitals, shopping centres, theatres) and similar applications where maintenance of power supply during a fire is required for a defined period of time.

Standard length cable packing:	500 or 1,000 m on drums. Other forms of packing and delivery are available on request.
--------------------------------	-------------------------------------------------------------------------------------------

## Approvals

BASEC	25 mm <sup>2</sup> to 400 mm <sup>2</sup> 2-core, 3-core, 4-core and 1,5 mm <sup>2</sup> to 16 mm <sup>2</sup> 2-core, 3-core, 4-core
LPCB	1,5 mm <sup>2</sup> to 400 mm <sup>2</sup> 2-core, 3-core, 4-core and 1,5 mm <sup>2</sup> to 16 mm <sup>2</sup> 2-core, 3-core, 4-core

# FLAME-X 950 SERIES 4

## 600/1000V

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of outer sheath	Nominal diameter of armour wires	Approx. overall diameter	Approx. net weight of cables	Maximum conductor resistance at 20°C	Current rating single-phase A.C. or D.C. *		Voltage Drop D.C.*	Voltage Drop single-phase A.C.*
							Clipped direct	Free Air		
<b>n × mm<sup>2</sup></b>	<b>mm</b>	<b>mm</b>	<b>mm</b>	<b>mm</b>	<b>kg/km</b>	<b>Ω/km</b>	<b>Amp</b>	<b>Amp</b>	<b>mV/A/m</b>	<b>mV/A/m</b>
2 × 1.5	0.6	1.3	0.9	12.8	346	12.1	27	29	31.0	31.0
2 × 2.5	0.7	1.4	0.9	14.3	420	7.41	36	39	19.0	19.0
2 × 4	0.7	1.4	0.9	15.3	491	4.61	49	52	12.0	12.0
2 × 6	0.7	1.4	0.9	16.1	554	3.08	62	66	7.9	7.9
2 × 10	0.7	1.5	0.9	18.1	712	1.83	85	90	4.7	4.7
2 × 16	0.7	1.5	1.25	20.8	1032	1.15	110	115	2.9	2.9
2 × 25	0.9	1.6	1.25	24.8	1421	0.727	146	152	1.85	1.90
2 × 25	0.9	1.6	1.25	20.8	1097	0.727	146	152	1.85	1.90
2 × 35	0.9	1.7	1.6	28.2	1944	0.524	180	188	1.35	1.35
2 × 35	0.9	1.7	1.6	23.5	1494	0.524	180	188	1.35	1.35
2 × 50	1.0	1.8	1.6	25.7	1830	0.387	219	228	0.98	1.00
2 × 70	1.1	1.9	1.6	28.7	2370	0.268	279	291	0.67	0.69
2 × 95	1.1	2.0	2.0	32.6	3239	0.193	338	354	0.49	0.52
2 × 120	1.2	2.1	2.0	35.1	3823	0.153	392	410	0.39	0.42
2 × 150	1.4	2.2	2.0	38.1	4534	0.124	451	472	0.31	0.35
2 × 185	1.6	2.4	2.5	42.9	5856	0.0991	515	539	0.25	0.29
2 × 240	1.7	2.5	2.5	46.7	7155	0.0754	607	636	0.195	0.24
2 × 300	1.8	2.6	2.5	50.7	8555	0.0601	698	732	0.155	0.21

# FLAME-X 950 SERIES 4

## 600/1000V

28

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of outer sheath	Nominal diameter of armour wires	Approx. overall diameter	Approx. net weight of cables	Maximum conductor resistance at 20°C	Short circuit current rating	Current rating three phase A.C.*		Voltage Drop three phase A.C.*
								Clipped direct	Free Air	
n × mm <sup>2</sup>	mm	mm	mm	mm	kg/km	Ω/km	Amp	Amp	Amp	mV/A/m
3 × 1.5	0.6	1.3	0.9	13.4	377	12.1	210	23	25	27.0
3 × 2.5	0.7	1.4	0.9	15	465	7.41	350	31	33	16.0
3 × 4	0.7	1.4	0.9	16.1	544	4.61	570	42	44	10.0
3 × 6	0.7	1.4	0.9	16.9	628	3.08	850	53	56	6.8
3 × 10	0.7	1.5	1.25	19.7	944	1.83	1400	73	78	4.0
3 × 16	0.7	1.6	1.25	22.1	1215	1.15	2200	94	99	2.5
3 × 25	0.9	1.7	1.6	27.5	1887	0.727	3575	124	131	1.65
3 × 25	0.9	1.7	1.6	25	1637	0.727	3575	124	131	1.65
3 × 35	0.9	1.8	1.6	30	2314	0.524	5005	154	162	1.15
3 × 35	0.9	1.8	1.6	27.4	2025	0.524	5005	154	162	1.15
3 × 50	1.0	1.8	1.6	29.8	2472	0.387	7150	187	197	0.87
3 × 70	1.1	1.9	1.6	33.5	3237	0.268	10010	238	251	0.60
3 × 95	1.1	2.1	2.0	38	4434	0.193	13585	289	304	0.45
3 × 120	1.2	2.2	2.0	41.1	5287	0.153	17160	335	353	0.37
3 × 150	1.4	2.3	2.5	46.5	6768	0.124	21450	386	406	0.30
3 × 185	1.6	2.4	2.5	50.4	8094	0.0991	26455	441	463	0.26
3 × 240	1.7	2.6	2.5	55.4	10053	0.0754	34320	520	546	0.21
3 × 300	1.8	2.7	2.5	60.2	11949	0.0601	42900	599	628	0.185
3 × 400	2.0	2.9	2.5	66.8	14895	0.0470	57200	673	728	0.165

# FLAME-X 950 SERIES 4

## 600/1000V

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of outer sheath	Nominal diameter of armour wires	Approx. Overall diameter	Approx. Net weight of cables	Maximum conductor resistance at 20°C	Short circuit current rating	Current rating three phase A.C.*		Voltage Drop Three phase A.C.*
								Clipped direct	Free Air	
n × mm <sup>2</sup>	mm	mm	mm	mm	kg/km	Ω/km	Amp	Amp	Amp	mV/A/m
4 × 1.5	0.6	1.3	0.9	14.4	422	12.1	210	23	25	27.0
4 × 2.5	0.7	1.4	0.9	16.1	522	7.41	350	31	33	16.0
4 × 4	0.7	1.4	0.9	17.4	628	4.61	570	42	44	10.0
4 × 6	0.7	1.5	1.25	19.1	848	3.08	850	53	56	6.8
4 × 10	0.7	1.5	1.25	21.3	1091	1.83	1400	73	78	4.0
4 × 16	0.7	1.6	1.25	24	1440	1.15	2200	94	99	2.5
4 × 25	0.9	1.7	1.6	29.9	2240	0.727	3575	124	131	1.65
4 × 25	0.9	1.7	1.6	27.7	2028	0.727	3575	124	131	1.65
4 × 35	0.9	1.8	1.6	32.6	2769	0.524	5005	154	162	1.15
4 × 35	0.9	1.8	1.6	30.3	2491	0.524	5005	154	162	1.15
4 × 50	1.0	1.9	1.6	33.3	3111	0.387	7150	187	197	0.87
4 × 70	1.1	2.1	2.0	38.9	4418	0.268	10010	238	251	0.60
4 × 95	1.1	2.2	2.0	42.6	5607	0.193	13585	289	304	0.45
4 × 120	1.2	2.3	2.5	47.9	7216	0.153	17160	335	353	0.37
4 × 150	1.4	2.4	2.5	51.9	8559	0.124	21450	386	406	0.30
4 × 185	1.6	2.6	2.5	56.6	10275	0.0991	26455	441	463	0.26
4 × 240	1.7	2.7	2.5	62.4	12855	0.0754	34320	520	546	0.21
4 × 300	1.8	2.9	2.5	67.4	15307	0.0601	42900	599	628	0.185
4 × 400	2.0	3.2	3.15	77.0	19826	0.0470	57200	673	728	0.165

\* acc to BS 7671 table 4E4A & 4E4B

All the information contained in this document - including tables and diagrams - is given in good faith and believed to be correct at the time of publication. The information does not constitute a warranty nor representation for which TELE-FONIKA Kable assumes legal responsibility. TELE-FONIKA Kable reserves rights to introduce changes to the document at any time.



BS 7846  
Cert No. 1354a



# FLAME-X 950 SERIES 6

## 600/1000V

BS 7846 - F120

Armoured fire resistant electric power and control cable having low emission of smoke and corrosive gases when affected by fire

30

### CONSTRUCTION

<b>Conductors:</b>	Circular, circular compacted or shaped stranded, annealed copper conductor, class 2 acc. to BS EN 60228
<b>Primary insulation:</b>	Fire resistant mica tape with a glass cloth
<b>Insulation:</b>	Cross-linked polyethylene (XLPE) of GP8 type acc. to BS 7655-1.3
<b>Cable core:</b>	Insulated conductors twisted together wrapped by fire resistance tape (optional also by polyester film)
<b>Bedding:</b>	Thermoplastic zero halogen low smoke compound (LSOH) wrapped by fire resistance tape
<b>Armour:</b>	Galvanized steel wires applied helically (optional polyester film over the armour)
<b>Outer sheath:</b>	Thermoplastic zero halogen low smoke compound of LTS1 type acc. to BS 7655-6.1



### CHARACTERISTICS

<b>Colour of sheath:</b>	Black. Other colours are available on special request.	
<b>Core identification:</b>	As per old IEEE regulations	As per new IEEE regulations
	1 core: black	blue
	2 core: red, black	brown, blue
	3 core: red, yellow, blue	brown, black, grey
	4 core: red, yellow, blue, black	blue, brown, black, grey
	5 core: red, yellow, blue, black, gn/yellow	gn/yellow, blue, brown, black, grey
	*We can offer both old or new IEEE regulation core colors	
<b>Maximum conductor operating temperature</b>	+90°C	
<b>Lowest installation temperature:</b>	0°C	
<b>Minimum operating temperature after installation without movement:</b>	-40°C	

# FLAME-X 950 SERIES 6

## 600/1000V

Maximum short-circuit conductor temperature:	+250°C
Minimum bending radius:	6 × D for cables with circular copper conductors 8 × D for cables with shaped copper conductors D – overall diameter

## Fire performance

31

Fire resistance:	BS 8491	Category F120
	BS 8519	Category 1, 2 and 3
Flame propagation:	BS EN 60332-1-2	
	BS EN 60332-3-24	
Smoke density:	BS EN 61034-2	
Corrosive and acid gases emission:	BS EN 60754-1 <sup>1)</sup>	HCl content < 0.5%
	BS EN 60754-2 <sup>1)</sup>	pH ≥ 4.3 & conductivity ≤ 10 μSmm <sup>-1</sup>

1) BS EN 60754-1 & BS EN 60754-2 standards replace BS EN 50267-2-1

## Applications

Enhanced fire resistant armoured cables for use in life safety and fire fighting systems of public buildings (hospitals, shopping centres, theatres, stadiums) and similar applications where maintenance of power supply during a fire is critical.

Standard length cable packing:	500 or 1,000 m on drums. Other forms of packing and delivery are available on request.
--------------------------------	-------------------------------------------------------------------------------------------

## Approvals

BASEC	4 mm <sup>2</sup> to 16 mm <sup>2</sup> 3-core, 4-core and 25 mm <sup>2</sup> to 400 mm <sup>2</sup> 2-core, 3-core, 4-core;
LPCB	4 mm <sup>2</sup> to 16 mm <sup>2</sup> 3-core, 4-core and 25 mm <sup>2</sup> to 400 mm <sup>2</sup> 3-core, 4-core

# FLAME-X 950 SERIES 6

## 600/1000V

32

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of outer sheath	Nominal diameter of armour wires	Approx. overall diameter	Approx. net weight of cables	Maximum conductor resistance at 20°C	Current rating single-phase A.C. or D.C. *		Voltage Drop D.C.*	Voltage Drop single-phase A.C.*
							Clipped direct	Free Air		
n × mm <sup>2</sup>	mm	mm	mm	mm	kg/km	Ω/km	Amp	Amp	mV/A/m	mV/A/m
2 × 4 RM	0.7	1.4	1.25	20.1	712	4.61	49	52	12.0	12.0
2 × 6 RM	0.7	1.4	1.25	20.1	744	3.08	62	66	7.9	7.9
2 × 10 RM	0.7	1.5	1.25	20.9	839	1.83	85	90	4.7	4.7
2 × 16 RM	0.7	1.5	1.25	22.9	1027	1.15	110	115	2.9	2.9
2 × 25 RM	0.9	1.6	1.25	26.4	1425	0.727	146	152	1.85	1.90
2 × 35 RM	0.9	1.7	1.6	29.8	1929	0.524	180	188	1.35	1.35
2 × 50 SM	1.0	1.8	1.6	27.1	1963	0.387	219	228	0.98	1.00
2 × 70 SM	1.1	1.9	1.6	31.0	2552	0.268	279	291	0.67	0.69
2 × 95 SM	1.1	2.0	2.0	34.0	3392	0.193	338	354	0.49	0.52
2 × 120 SM	1.2	2.1	2.0	36.5	4014	0.153	392	410	0.39	0.42
2 × 150 SM	1.4	2.2	2.0	39.5	4717	0.124	451	472	0.31	0.35
2 × 185 SM	1.6	2.4	2.5	44.3	6069	0.0991	515	539	0.25	0.29
2 × 240 SM	1.7	2.5	2.5	48.1	7390	0.0754	607	636	0.195	0.24
2 × 300 SM	1.8	2.6	2.5	52.1	8772	0.0601	698	732	0.155	0.21
2 × 400 SM	2.0	2.8	2.5	59.6	11120	0.047	787	847	0.120	0.19



# FLAME-X 950 SERIES 6

## 600/1000V

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of outer sheath	Nominal diameter of armour wires	Approx. overall diameter	Approx. net weight of cables	Maximum conductor resistance at 20°C	Short circuit current rating	Current rating three phase A.C.*		Voltage Drop three phase A.C.*
								Clipped direct	Free Air	
<b>n × mm<sup>2</sup></b>	<b>mm</b>	<b>mm</b>	<b>mm</b>	<b>mm</b>	<b>kg/km</b>	<b>Ω/km</b>	<b>Amp</b>	<b>Amp</b>	<b>Amp</b>	<b>mV/A/m</b>
3 × 4 RM	0.7	1.4	1.25	20.2	832	4.61	570	42	44	10.0
3 × 6 RM	0.7	1.4	1.25	20.1	803	3.08	850	53	56	6.8
3 × 10 RM	0.7	1.5	1.25	21.8	985	1.83	1400	73	78	4.0
3 × 16 RM	0.7	1.6	1.25	24.2	1241	1.15	2200	94	99	2.5
3 × 25 RM	0.9	1.7	1.6	29.1	1930	0.727	3575	124	131	1.65
3 × 35 RM	0.9	1.8	1.6	31.6	2328	0.524	5005	154	162	1.15
3 × 50 SM	1.0	1.8	1.6	31.2	2629	0.387	7150	187	197	0.87
3 × 70 SM	1.1	1.9	1.6	34.9	3394	0.268	10010	238	251	0.60
3 × 95 SM	1.1	2.1	2.0	39.4	4617	0.193	13585	289	304	0.45
3 × 120 SM	1.2	2.2	2.0	42.5	5486	0.153	17160	335	353	0.37
3 × 150 SM	1.4	2.3	2.5	47.9	7003	0.124	21450	386	406	0.30
3 × 185 SM	1.6	2.4	2.5	51.8	8352	0.0991	26455	441	463	0.26
3 × 240 SM	1.7	2.6	2.5	56.8	10299	0.0754	34320	520	546	0.21
3 × 300 SM	1.8	2.7	2.5	61.6	12262	0.0601	42900	599	628	0.185
3 × 400 SM	2.0	2.9	2.5	68.9	15520	0.0470	57200	673	728	0.165

# FLAME-X 950 SERIES 6

## 600/1000V

34

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of outer sheath	Nominal diameter of armour wires	Approx. overall diameter	Approx. net weight of cables	Maximum conductor resistance at 20°C	Short circuit current rating	Current rating three phase A.C.*		Voltage Drop Three phase A.C.*
								Clipped direct	Free Air	
<b>n × mm<sup>2</sup></b>	<b>mm</b>	<b>mm</b>	<b>mm</b>	<b>mm</b>	<b>kg/km</b>	<b>Ω/km</b>	<b>Amp</b>	<b>Amp</b>	<b>Amp</b>	<b>mV/A/m</b>
4 × 4 RM	0.7	1.4	1.25	20.1	869	4.61	570	42	44	10.0
4 × 6 RM	0.7	1.5	1.25	21.2	906	3.08	850	53	56	6.8
4 × 10 RM	0.7	1.5	1.25	23.4	1140	1.83	1400	73	78	4.0
4 × 16 RM	0.7	1.6	1.25	26.1	1466	1.15	2200	94	99	2.5
4 × 25 RM	0.9	1.7	1.6	31.5	2261	0.727	3575	124	131	1.65
4 × 35 RM	0.9	1.8	1.6	34.2	2752	0.524	5005	154	162	1.15
4 × 50 SM	1.0	1.9	1.6	34.7	3271	0.387	7150	187	197	0.87
4 × 70 SM	1.1	2.1	2.0	40.3	4605	0.268	10010	238	251	0.60
4 × 95 SM	1.1	2.2	2.0	44.0	5789	0.193	13585	289	304	0.45
4 × 120 SM	1.2	2.3	2.5	49.3	7460	0.153	17160	335	353	0.37
4 × 150 SM	1.4	2.4	2.5	53.3	8785	0.124	21450	386	406	0.30
4 × 185 SM	1.6	2.6	2.5	58.0	10528	0.0991	26455	441	463	0.26
4 × 240 SM	1.7	2.7	2.5	63.8	13141	0.0754	34320	520	546	0.21
4 × 300 SM	1.8	2.9	2.5	68.8	15622	0.0601	42900	599	628	0.185
4 × 400 SM	2.0	3.2	3.15	79.1	20575	0.0470	57200	673	728	0.165

\* acc to BS 7671 table 4E4A & 4E4B

All the information contained in this document - including tables and diagrams - is given in good faith and believed to be correct at the time of publication. The information does not constitute a warranty nor representation for which TELE-FONIKA Kable assumes legal responsibility. TELE-FONIKA Kable reserves rights to introduce changes to the document at any time.

## Certificates issued by LPCB

Type	Series 1	Series 2	Series 2e	Series 3	Series 4	Series 6
No	814c	814a 814f	814b 814g	1354b 1354d	814d 1354c	1354a

## Applications Flame-X 950 cables

Low Smoke Zero Halogen Fire Resistant Flame-X 950 types can be used for applications where SAFETY of human is top priority, especially where sophisticated systems are provided, example:

- Mass Transit Systems,
- High rise buildings
- Confined locations (e.g underground metro stations)
- Schools & Hospitals
- Shopping Malls
- Other places with a large concentration of people

## Installation and Storage recommendation:

Flame-X 950 Fire Resistant cables are very important for human life protection. That is why they need to be stored and installed with special care and attention.

We recommend:

- Cables shall be stored indoor and special care shall be taken when temperature rises above 45 deg C
- Cables shall not be exposed to direct sunlight for considerable period of time before installation.
- Preferably the installation shall be done during morning hours when the ambient temperature is low (applicable for Middle East conditions)
- Cables shall not be installed when ambient temperature is below 0 Deg. C
- During installation it is necessary to keep right bending radius. It cannot exceed value as per technical specification, at any point.
- Wire/Rope shall not be used directly on cable sheath for pulling
- Special attention is recommended when cable is pulled on cable tray.
- Rollers and bends shall not have any sharpness that can make damage,
- Flame-X 950 cables and wires shall be installed together with special compatible LSZH, fire performance equipment (joints, boxes) at installation site.

TELE-FONIKA Kable S.A. (DMCC Branch)

24F, Almas Tower

PO Box 393761

JLT Free Zone, Dubai, UAE.

T +971 4 4484300

F +971 4 4478856



TELE-FONIKA Kable S.A.

ul. Hipolita Cegielskiego 1  
32-400 Myślenice, Poland

T. +48 12 652 5000

F. +48 12 652 5156

[info@tfkable.com](mailto:info@tfkable.com)

[www.tfkable.com](http://www.tfkable.com)